




Features / Design

Forged Ball Valves / Bolted Body - 152 Series

- Full Port minimizes pressure drop and prolongs life.
- Forged Steel body construction (two pieces design).
- Bolted body option.
- Threaded NPT Ends ANSI B1.20.1.
- Socket Weld Ends ANSI B16.11 option available.
- ANSI Class 1500#.
- Manufactured in ISO 9001 approved facility.
- Design according API 608, ANSI/ASME B16.34.
- Fire Safe API 607 (upon request).
- Hydrostatic Tests according API 598 & API 6D.
- NACE MR0175 (upon request).
- Comply with API 608.

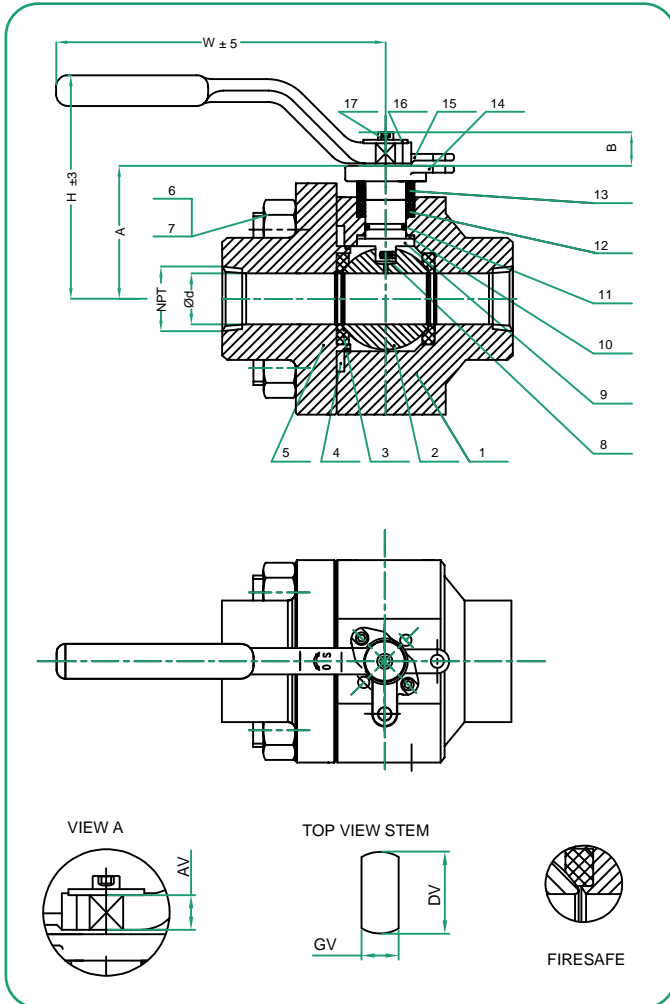

NOTE: THIS DRAWING IS ONLY OF REFERENCE.

Material List

POS	DESCRIPTION	MATERIAL
1	BODY	ASTM A105N
2	BALL	ASTM A182 F316
3	SEAT RING	R-PTFE
4	GASKET	SS304 + GRAPHITE
5	BONNET	ASTM A105N
6	HEX. BOLT	ASTM A193 B7M
7	HEX. NUT	ASTM A194 2HM
8	ANTISTATIC SPRING	SS 304
9	STEM	17-4PH
10	THRUST PAD	R-PTFE
11	O-RING	VITON
12	PACKING	GRAPHITE
13	GLAND	ASTM A276 410
14	GLAND FLANGE	ASTM A216 WCB
15	HANDLE	ASTM A216 WCB
16	FLAT PAD	CARBON STEEL
17	HEAD BOLT	ASTM A193 B8

NOTES:


1. Seat Material options: RPTFE & PEEK (Other seats available).
2. Internal Material options: Stainless Steel ASTM A182 Gr. 304/304L/316L/F51; Alloy Steel ASTM A182 Gr. F6a.
3. Body Material options: Forged Steel ASTM A105, ASTM A350 Gr. LF2; Stainless Steel ASTM A182 Gr. F304L / F316L / F51.



Dimensions

NPS (in)	L (mm)	d (mm)	A (mm)	B (mm)	W (mm)	H (mm)	DV (mm)	GV (mm)	AV (mm)	NPS (in)	Weight (kg)	CV (USgal/min)	Open Torque (Nm)	Close Torque (Nm)
1/2"	100.0	13.0	51.0	14.6	182.0	86.0	10.0	7.0	7.0	1/2"	2.5	17.0	25.0	20.0
3/4"	113.0	19.0	53.3	17.3	211.0	98.4	14.0	9.0	9.0	3/4"	3.6	37.0	35.0	28.0
1"	128.0	25.0	62.2	21.8	272.7	116.0	18.0	12.0	11.0	1"	5.9	65.0	50.0	40.0
1 1/2"	156.0	38.0	80.5	26.0	335.0	145.0	22.0	16.0	15.0	1 1/2"	12.9	149.0	75.0	62.0
2"	172.0	51.0	87.7	26.0	335.0	150.4	22.0	16.0	15.0	2"	18.7	269.0	110.0	88.0
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Pressure-Temperature Chart

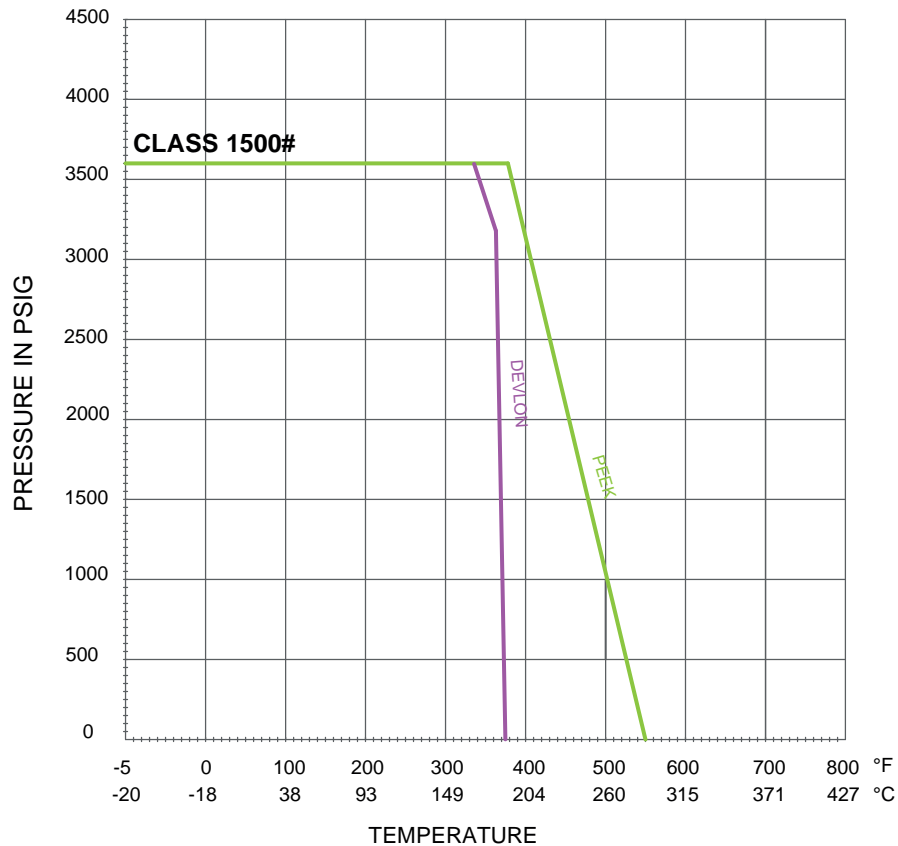

How to Order

BODY DESIGN (SERIES)	FEATURES	MATERIAL			ENDS	CLASS	SIZE		OPERATION	
		BODY	TRIM	SEAT						
152 ANSI 1500# (2-pieces bolted body)	F Fire Safe	2 A105	3 316 SS	R RPTFE	T Threaded	1 ANSI 1500#	0.5	1/2"	L Manual Lever Operator	
	N NACE	3 316 SS	4 304 SS	K PEEK	S Socketweld		0.75	3/4"		
	G Fire Safe & NACE	4 304 SS	5 316L SS	N NYLON	F Flanged ⁽¹⁾		P PUPS ⁽²⁾	01	1"	C Manual Lever Operator with Locking Device
		5 316L SS	7 304L SS	L DEVLON						
		7 304L SS	8 F6a	M MOLON						
		8 LF2	9 F51 Duplex							
		9 F51 Duplex								

Example:

Forged Steel Ball Valve, 2 Pcs. design, Fire Safe API 607, Body A105 + 316 SS Trim, Seat RPTFE, Threaded ANSI Class 1500#, Size 2" Ø, Manual Lever Operator.

152F23RT102L

(1) Flanged valves options are flange welded (not integral body).

(2) PUPS to be specified at the connection and final schedule, recommended length 100 mm/side

Please contact us for more information about sizes and ratings allowed.

